

Shaft Eccentricity Monitor Specifications

The Shaft Eccentricity Monitor is designed for high reliability for the plant's most critical rotating machinery. This 1-slot monitor is used together with other CSI 6500 monitors to build a complete API 670 machinery protection monitor. Applications include steam, gas, compressors and hydro turbomachinery.

The main functionality of the Shaft Eccentricity Monitor is to accurately monitor shaft eccentricity and reliably protect machinery by comparing vibration parameters against alarm set-points, driving alarms and relays.

Shaft eccentricity monitoring consists of a displacement sensor either mounted through the bearing case or mounted internally on the bearing housing with an eccentricity collar near the thrust bearing as the target. The displacement sensor is a non-contact sensor measuring shaft movement proportional to shaft bowing or bent shaft, below 600 rpm.

Shaft eccentricity monitoring is an important measurement on large sleeve bearing machines for predictive and protection monitoring.

The CSI 6500 Machinery Health Monitor is an integral part of PlantWeb® and AMS Suite. PlantWeb provides operations-integrated machinery health combined with the Ovation® and DeltaV™ process control system. AMS Suite provides maintenance personnel advanced predictive and performance diagnostic tools to confidently and accurately determine machine malfunctions early.



- Two-channel, 3U size, 1-slot plug in module decreases cabinet space requirements in half from traditional four-channel 6U size cards
- API 670 compliant, hot swappable module
- Remote selectable limit multiply and trip bypass
- Front and rear buffered and proportional outputs, 0/4-20 mA output, 0-10 V output
- Self-checking facilities include monitoring hardware, power input, hardware temperature, sensor and cable
- Use with displacement sensor 6422, 6423, 6424 and 6425, driver CON XXX and key monitoring module


Transducer Inputs	
Number of inputs	Two, independent
Type of inputs	Eddy current differential
Emerson sensor inputs	Part number: 6422, 6423, 6424, 6425
Isolation	Galvanically separated from power supply
Input resistance	>100 kΩ
Input voltage range	-1 to 23 VDC
Input frequency range	0.017-70 Hz (102-4200 rpm)
Measuring Range	
Range	Continuously adjustable with the configuration software
Smallest range	0-400 mV peak
Largest range	0-8000 mVpeak
Sensor power supply	Separate buffered sensor supply Galvanically separated from all system voltages and system supply voltage Open and short circuit proof
Nominal voltage	-26.7 VDC
Available current	Nominal 20 mA, maximum 35 mA
Front Panel Outputs	
Green LED's	Two LED's, indicates channel OK separately for each channel
Red LED's	Four LED's, indicates alert and danger separately for each channel
Front panel buffered outputs	Two, identical to transducer sensor inputs -1 to - 24 V, >100 kΩ load, freq. range 0-16 kHz (-3db)
Mini DIN configuration socket	Module interface connection for configuration and parameter and status monitoring RS-232
Handle	Easily remove card and provide plate for module and sensor identification
Analysis	
Measurement modes	Hot configurable (60 second settling time) Peak to peak Min/max measurement Continuous gap measurement
Configurable parameters	Measuring range Engineering units Sensor sensitivity

Rear Outputs Available	
Current mode outputs	0/4-20 mA output for each channel proportional to main value Open/short circuit proof
Permissible load	<500 Ω
Accuracy	±1% of full scale
Settling time	configurable, 0-10 seconds
Voltage mode outputs	0-10 VDC output proportional to main value for each channel Open/short circuit proof
Permissible load	>10 kΩ
Rear buffered outputs	Raw buffered output signal, AC and DC Open/short circuit proof
Frequency range	0 Hz-16 kHz (-3 dB)
Permissible load	>10 kΩ
DC Voltage Outputs	0-10 VDC output proportional to the shaft position (gap) Open/short circuit proof
Accuracy	±1% of range
Permissible load	>10 kΩ
Alarm Setpoints Alarm time delays	
Alert	Selectable normally open, normally closed 0-5 second delay per channel 0-36 second delay with A6740 relay card Selectable to be blocked on channel not OK Adjustable range 5-100% of full scale value Resolution 1% of full scale value Alarm hysteresis on decreasing signal value, 0-20% of full scale value
Danger	Selectable normally open, normally closed 0-5 second delay per channel 0-36 second delay with A6740 relay card Selectable to be blocked on channel not OK Adjustable range 5-100% of full scale value Resolution 1% of full scale value Alarm hysteresis on decreasing signal value, 0-20% of full scale value
OK	Self checking (normally closed): <ul style="list-style-type: none"> ■ power supply, sensor, cable, module checking, overload, internal temperature, system watchdog Green LED: <ul style="list-style-type: none"> ■ off when not OK ■ during delay time, LED flashes ■ reason for not OK can be read from communication bus
Limit multiply	Remote, relay input, 1.00-4.99 factor
Trip bypass	Remote, relay input

Environmental, General	
Module	IP 00, DIN 40050
Front plate	IP 21, DIN 40050
Climate	DIN 40040 class KTF
Operating Temperature	0°-65° C (32°-149° F)
Storage Temperature	-30°-85° C (-22°-185° F)
Relative humidity	5-95%, non condensing
Vibration	IEC 68-2, part 6 0.15 mm, 10-55 Hz 19.6 mm/s ² , 55-150 Hz
Shock	IEC 68-2, part 29 98 m/s ² peak, 16 ms
EMC resistance	EN50081-1 / EN50082-2
Power consumption	Max. 6 W, 250 mA at 24 VDC
Configuration	Password protected

Dimensions:

PCB/EURO card format according to DIN 41494, 100 x 160 mm (3.937 x 6.300 in)
 Width: 30.0mm (1.181 in) (6 TE)
 Height: 128.4 mm (5.055 in) (3 HE)
 Length: 160.0 mm (6.300 in)
 Net weight: app 320 g (0.705 lbs)
 Gross weight: app 450 g (0.992 lbs) includes standard packing
 Packing volume: app 2.5 dm³ (0.08 ft³)
 Space requirements: 1 slot
 14 modules fit into each 19" rack

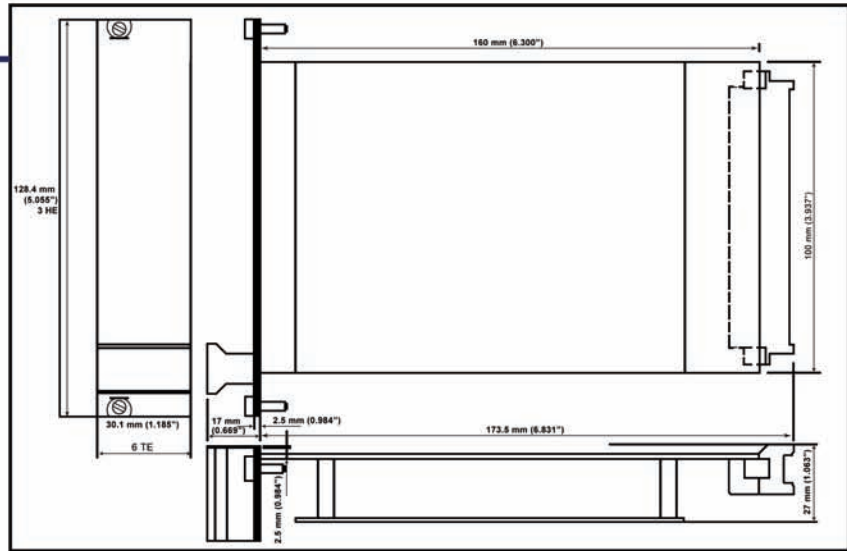

Ordering Information

Model Number	Product Description
A6220	Dual-channel Eccentricity Vibration Monitor

Emerson Process Management
Asset Optimization Division
 835 Innovation Drive
 Knoxville, TN 37932 USA
 T (865) 675-2400
 F (865) 218-1401

©2011, Emerson Process Management.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

All rights reserved. Machinery Health is a mark of one of the Emerson Process Management group of companies. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.



Online Machinery Health Management powers PlantWeb through condition monitoring of mechanical equipment to improve availability and performance.